
HEAVY DUTY HIGH INTENSITY HEATER



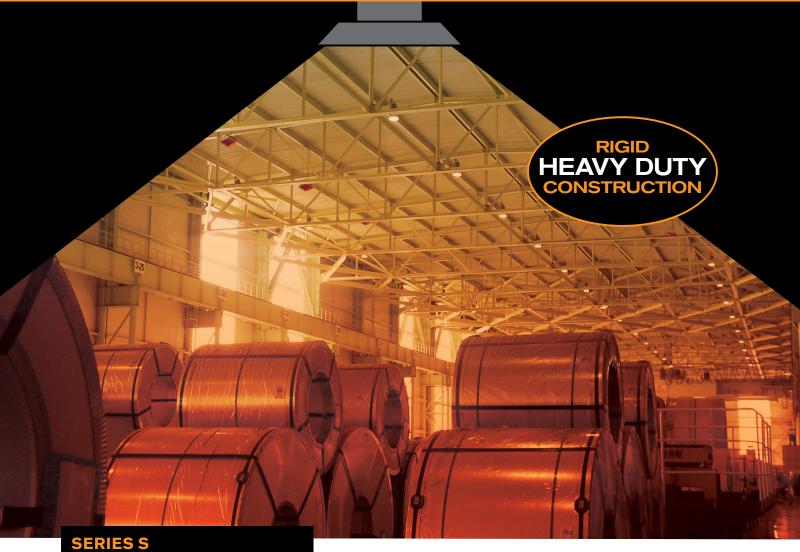

Model S

SERIES S STANDARD EFFICIENCY HIGH INTENSITY HEATER

Directed, cost-effective heat for cold spots in industrial and commercial applications

- Entire construction is non-corrosive aluminized steel
- · Low profile requires less space
- Reliable direct spark or millivolt ignition
- Unique pattern high output ceramics
- · Performance enhancing screens
- · Modular head construction
- Rates 30,000 to 132,000 BTUH
- NG or LPG



Maximized radiant efficiency with high-polished aluminum reflector

SERIES S - HEAVY DUTY HIGH INTENSITY HEATER

Heater	Part No	BTU/HR		Radiating	Dimensions			Shipping
		Natural Gas	LPG	Surface (sq. in.)	Height	Length	Width	Weight (lbs.)
	SD03N*	33,000	-	90	9.2"	16.3"	24.4"	36
	SD03P*	-	30,000					
TA I	SD06N*	66,000	-	180	9.2"	23.1"	24.4"	44
	SD06P*	-	60,000					
	SD09N*	99,000	-	270	9.2"	30.0"	24.4"	56
	SD09P*	-	90,000					
	SD12N*	132,000	1	360	9.2"	36.9"	24.4"	64
	SD12P*	-	120,000					

^{*} Substitute "M" for "D" for Millivolt

General Specifications		Inlet Pressure			Accessories Available		
Power Supply	24V	-	Natural Gas	Propane	Chain Kits		
Control	Direct Spark or Millivolt Ignition	Minimum	6.5" WC	11.0" WC	Thermostats Transformers Cap Floy Connectors		
Gas Supply	1/2" NPT	Maximum	1/2 psig.	1/2 psig.	Gas Flex Connectors Gas Shut Off Valves		

Visit our website for I/O manuals, specifications, and submittal data.











SUPERIOR



Superior Radiant Products Ltd. 563 Barton Street Stoney Creek, ON L8E 5S1 Canada Superior Radiant Products Inc. 315 N Madison Street Fortville, IN 46040 USA

1 800 527 HEAT(4328) | tel 1 905 664 8274 | fax 1 905 664 8846 sales@superiorradiant.com | www.superiorradiant.com

SAVING ENERGY FOR FUTURE GENERATIONS

